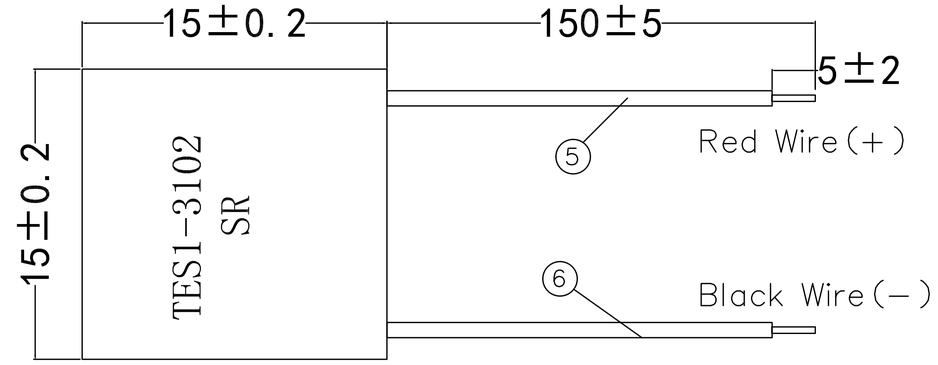

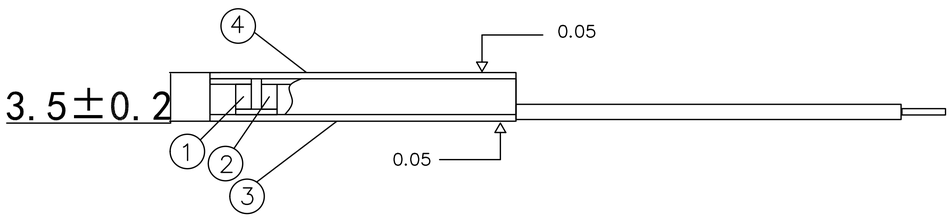

Technical requirements:

1) Product resistance range: 1.2-1.6Ω(T=25C).
2) Wire material: 3132 electronic wire wire end tin.
3) When the red wire is connected to the positive electrode, the above is the cooling surface.
4) The product is sealed with RVT704 silicone rubber.
5) Product cooling surface printing.

Item	Value	Test Environment
Vmax	3.7V	Qc=0, DT=DTmax, Th=31℃
Imax	2A	Qc=0, I=Imax, Th=31℃
DT	65℃	Qc=0, I=Imax, Th=31℃
Qmax	4.3W	I=Imax, DT=0, Th=31℃
Max Tem	120℃	Max Operating Temperature Resistant

	Materials		
1	P	Bi2Te3	
2	N	Bi2Te3	
3	Hot side	aluminum oxide	
4	Cold side	aluminum oxide	
5	black wire	PVC	
6	red wire	PVC	

	签名	日期
签名		
审核		
批准		
视图		

制冷片

TES1-3102

1 1

Huahai Technology Development Co.,LTD